

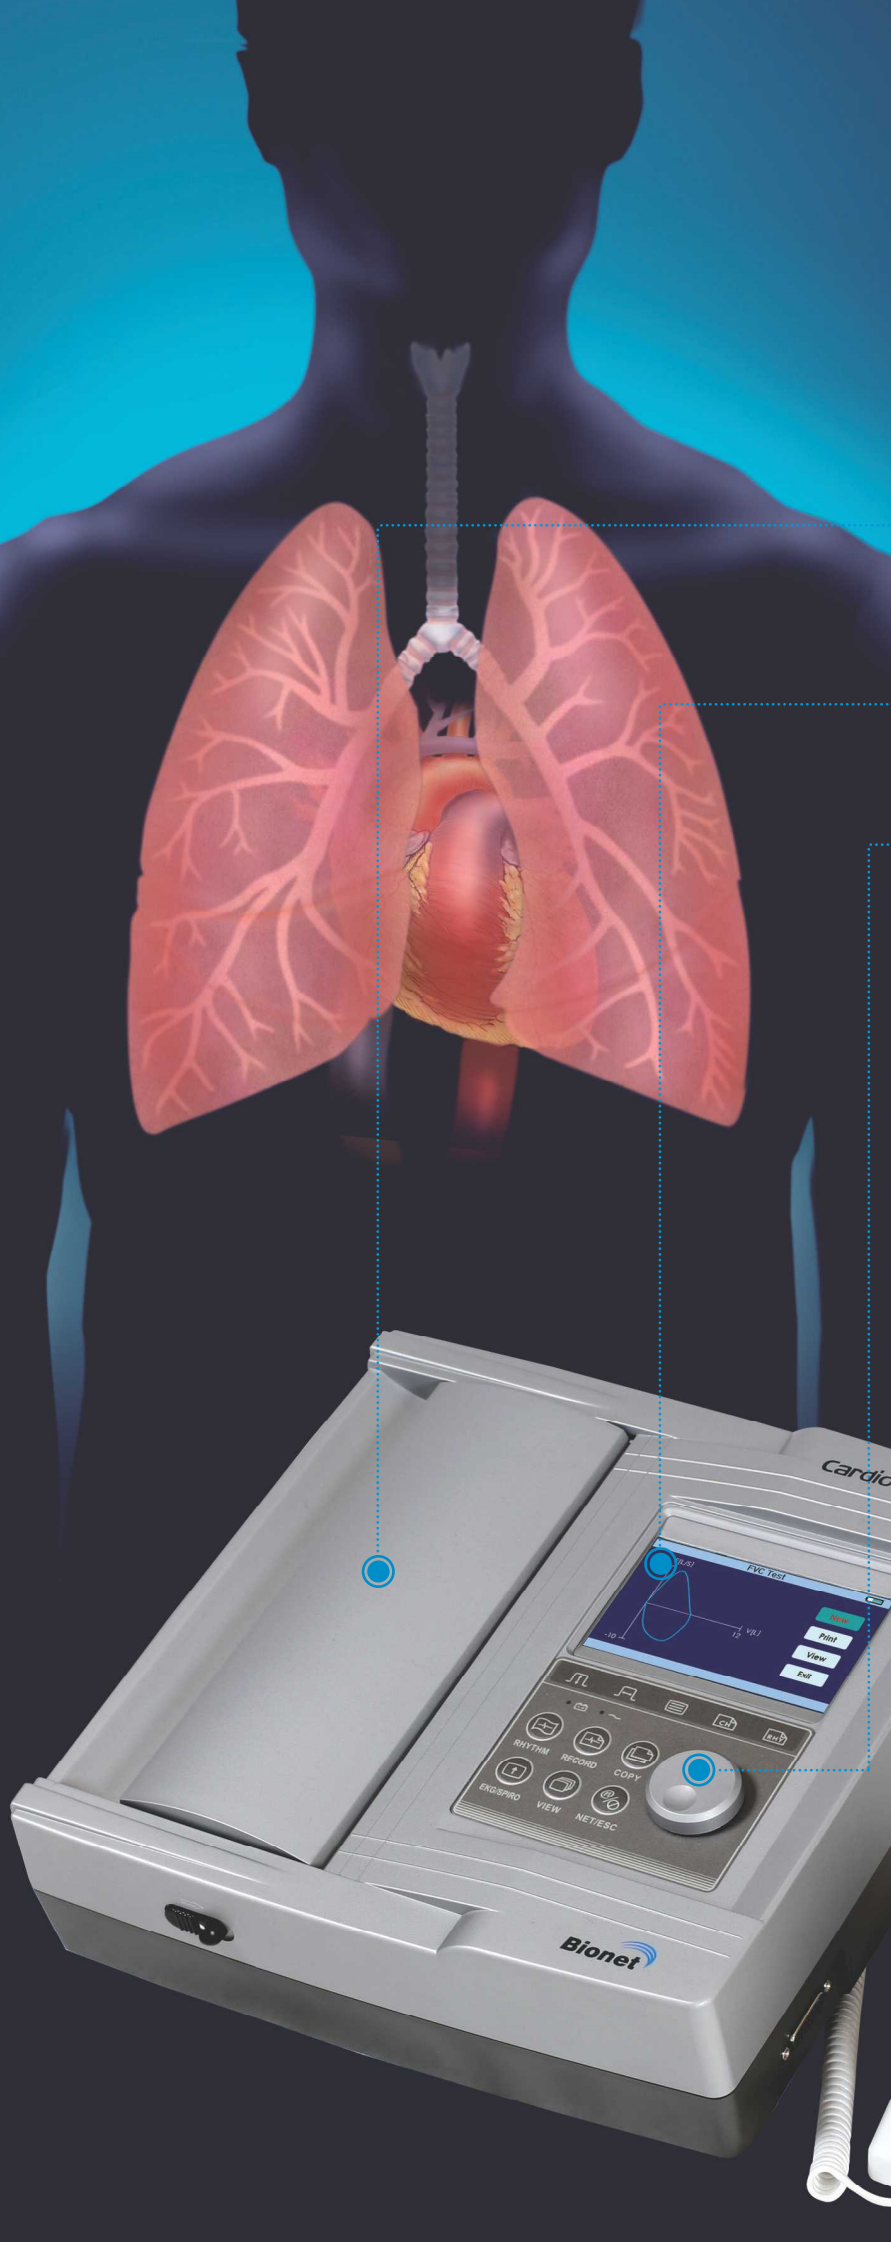
Spirometer






Infection-free Spirometer
Accurate and Hygienic Spirometer

SPM-300

- * Convenient A4 size print-outs allow for easy chart filing
- * Grid function allows you to use low cost plain fax paper
- * Wide and Clear Color TFT LCD
- * Touch screen for easy operation
- * PRE-POST bronchodilator Comparison
- * Rotary Key Access to All Menus
- * No Cleaning
Using disposable mouthpiece patented sensing method
- Breathing Protocol
 - FVC (Forced Vital Capacity)
 - SVC (Slow Vital Capacity)
 - MVV (Maximum Voluntary Ventilation)
- Various Formulas
Morris-Polgar, ECCS-Quanjer, Kundson-ITS
- Memory for up to 120 patients
- PC compatible through LAN
- Multi-language (English, Russian, French, German, Italian, Chinese, Spanish, Turkish, Polish, Romanian, Portuguese) available



	Bernoulli's Law	Pneumotachometer	Turbine
structure			
medium	SmarTube™	screen	Propeller or turbine
accuracy	error ratio < 1% (equal air density)	error ratio < 5% (air friction)	error ratio < 20% (inertia problem)
	User-friendly Infection-free	High probability of infection because of remain saliva or bacteria.	High probability of infection because of remain saliva or bacteria and low accuracy.

SPECIFICATIONS

Dimension	47(W) × 200(H) × 34(D)mm, approx.250g
Measuring Values	FVC: FVC, FEV 1.0, FEV 1/FVC, FEF 0.2-1.2L, FEF 25-75%, FEF 75-85%, PEF, FEF 25%, FEF 50%, FEF 75% SVC: SVC, ERV, IRV, TV, EC MVV: MVV, FB, TV
Presentation	Flow volume loop Flow time plot Measurement values table
Measuring range	Flow : 0 to ± 14 L/s Volume : 0 to ± 11L
Measuring method	Differential pressure method
Prediction equation	Morris-Polgar, ECCS-Quanjer, Knudson-ITS
Sample rate	200 samples/sec
Flow impedance	<0.2 mbar s/l at 12 l/s
Measuring accuracy	Complies with ATS (American Thoracic Society)
Environment	Ambient temperature : 15 to 40°C (59 to 104° F) Relative humidity : 10 to 90%(non-condensing) Atmospheric pressure : 700 to 1060hPa
Standard accessory	Disposable mouthpiece 2 EA Nose clip 1 EA Adapter 2 EA Operation manual 1 EA Disposable mouthpiece 1 box(100 EA)

*Specifications can be changed without prior notification.



North America(U.S.A) : Bionet America Inc.
Tel : +1-714-734-1760
E-mail : sales@ebionet.com
Homepage : www.bionetus.com

Latin America : Bionet Latin America Inc.
Tel : +1-714-734-1760
E-mail : jayshim@ebionet.com
Homepage : www.ebionet.com

South Korea : Bionet Co., Ltd.
Tel : +82-70-7585-6418(Int'l) / +82-2-6300-6483(Domestic)
E-mail : sales@ebionet.com(Int'l) / yunms@ebionet.com(Domestic)
Homepage : www.ebionet.com

Europe : MGB Endoskopische Geräte GmbH Berlin(Germay)
Tel : +49-30-6392-7000
E-mail : sales@mgb-berlin.de
Homepage : www.mgb-berlin.de